


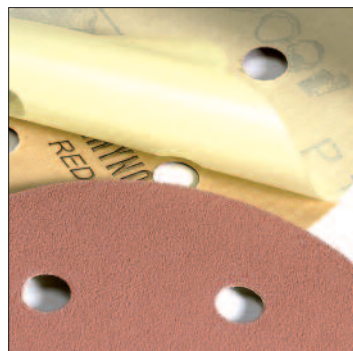

Features and benefits

High cutting power: very high stock removal.
Anti-clogging lubricant layer: longer life time.
Superior finish and easy release 'Tab'.
High performance on hard materials.

Product specifications

D/C wt paper with velour backing.
Lubricant coating (80 to 800).
Aluminum Oxide abrasive.
Modified synthetic resin bonding.

Application suggestions

Sanding and finishing of fillers, stoppers, primers, composite materials, wooden surfaces, wood coatings, metal coatings and metal surfaces.
For self stick backing pads and hand blocks.

RHYNOSTICK

RedLine



Grit Range

16 20 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000



Part # 300-XXX (Grit: 40 to 800)	3"	RedLine PSA Solid Discs
Part # 500-XXX (Grit: 36 to 800)	5"	RedLine PSA Solid Discs
Part # 500-XXX (Grit: 80 to 800) LR	5"	RedLine PSA Solid Link Roll Discs
Part # 500-XXX (Grit: 80 to 800) LR25	5"	RedLine PSA Solid Link Roll Discs
Part # 540-XXX (Grit: 36 to 800)	5" 5 Hole	RedLine PSA Discs
Part # 560-XXX (Grit: 36 to 800)	5" 8 Hole	RedLine PSA Discs
Part # 600-XXX (Grit: 36 to 800)	6"	RedLine PSA Solid Discs
Part # 600-XXX (Grit: 80 to 800) LR	6"	RedLine PSA Solid Link Roll Discs
Part # 600-XXX (Grit: 80 to 800) LR25	6"	RedLine PSA Solid Link Roll Discs
Part # 610-XXX (Grit: 36 to 800)	6" 6 Hole	RedLine PSA Discs
Part # 800-XXX (Grit: 36 to 600)	8"	RedLine PSA Solid Discs
Part # 810-XXX (Grit: 36 to 600)	8" 8 Hole	RedLine PSA Discs
Part # 920-XXX (Grit: 36 to 600)	2 3/4" x 17 3/4"	RedLine PSA Strips
Part # 960-XXX (Grit: 36 to 600)	2 3/4" x 27 1/2 yds.	RedLine PSA Roll